


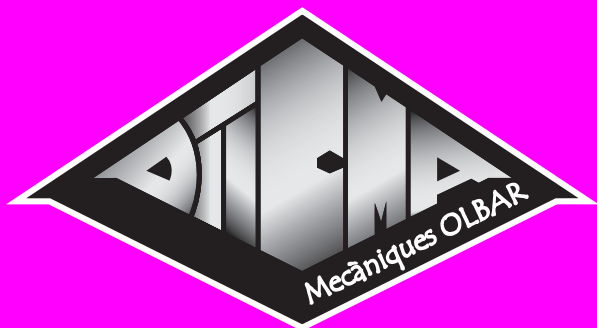


## DISSENY I CONSTRUCCIÓ MAQUINÀRIA ALIMENTÀRIA



### LINEA DE MANIPULACION

#### HANDLING LINE /

ELEVADORES / CARGADORES DE MÁQUINAS SIMETRICO tipo "RBS-500" y "RBS-120"  
LIFT LOADERS FOR MACHINES type "RBS-500" and "RBS-120"

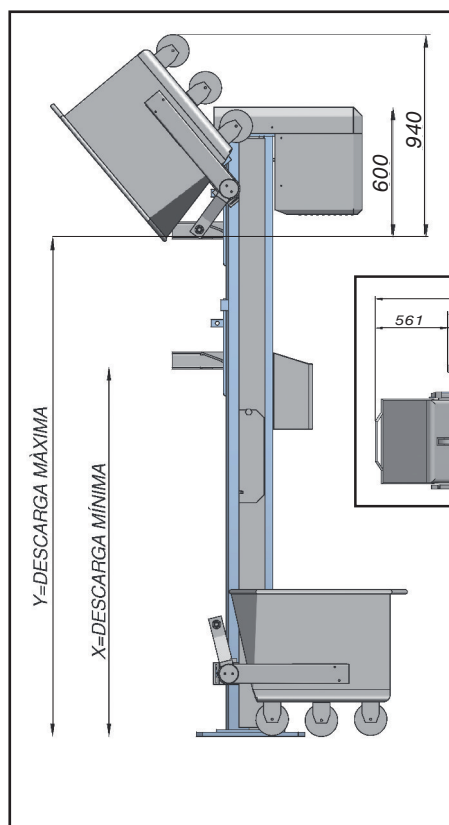

| ELEVADORES RBS-500 |       |       |                           |                           |
|--------------------|-------|-------|---------------------------|---------------------------|
| DESCARGA           | X(mm) | Y(mm) | ALTURA ELEVADOR (Y+600mm) | ALTURA VOLCADOR (Y+940mm) |
| 2 metros           | 1450  | 2050  | 2650                      | 2990                      |
| 2,25 metros        | 1700  | 2300  | 2900                      | 3840                      |
| 2,50 metros        | 1950  | 2550  | 3150                      | 4090                      |
| 2,75 metros        | 2200  | 2800  | 3400                      | 4340                      |
| 3 metros           | 2450  | 3050  | 3650                      | 4590                      |

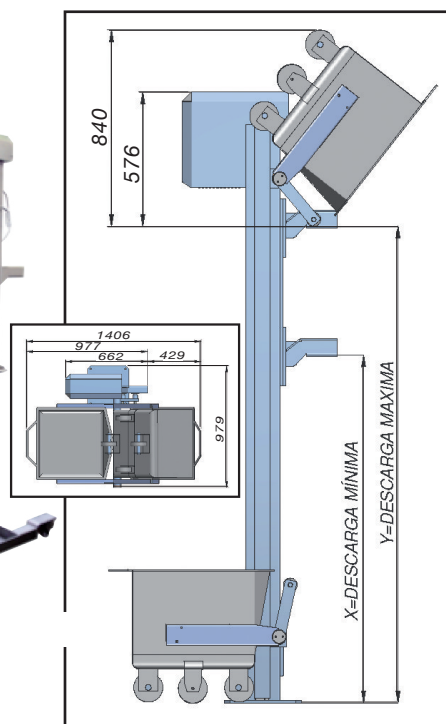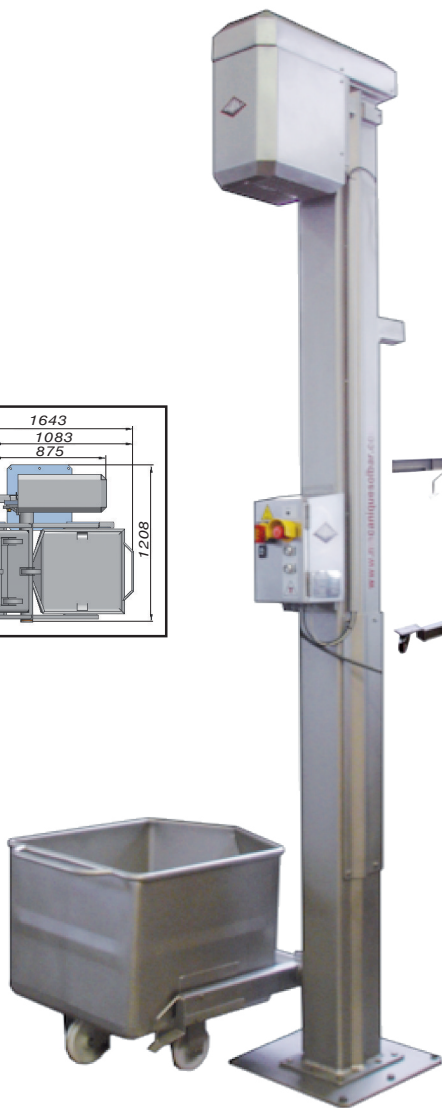

| ELEVADORES RBS-120 |       |       |                           |                           |
|--------------------|-------|-------|---------------------------|---------------------------|
| DESCARGA           | X(mm) | Y(mm) | ALTURA ELEVADOR (Y+600mm) | ALTURA VOLCADOR (Y+940mm) |
| 1,54 metros        | 990   | 1540  | 2116                      | 2380                      |
| 1,84 metros        | 1290  | 1840  | 2416                      | 2680                      |
| 2,04 metros        | 1490  | 2040  | 2616                      | 2880                      |



## DISSENY I CONSTRUCCIÓ MAQUINÀRIA ALIMENTÀRIA

### ELEVADOR CARGADOR DE MÁQUINAS. Tipo "RBS-500" y "RBS-120"

Cuadro eléctrico fijado en columna con contadores y relé térmico de seguridad.


- Alimentación eléctrica: 220/380V 50 Hz.
- Construido totalmente con acero inoxidable.
- Movimiento carro estabilizador con bandas polietileno, tuerca de bronce con dispositivo seguridad y tornillo "sin-fin" de Siemens, soportado por rodamientos axiales y cilíndricos.
- Pulsadores de: SUBIR, PARAR y BAJAR
- La horquilla de giro va colocada a la distancia correspondiente en función de la altura de descarga.

### LIFT LOADERS FOR MACHINES type "RBS-500" and "RBS-120"



Electric switchboard fixed to a column, with contactors and safety thermal relay.

- Electrical supply: 220/380V 50Hz.
- Completely made of stainless steel.
- Stabilising cart movement with polyethylene straps, bronze nut with security device and Siemens worm screw supported by axial and cylindrical bearings.
- Push buttons: UP, STOP and DOWN.
- The tilting fork is placed at the convenient distance according to the unloading height.

ELEVADOR RBS-500 MODEL A

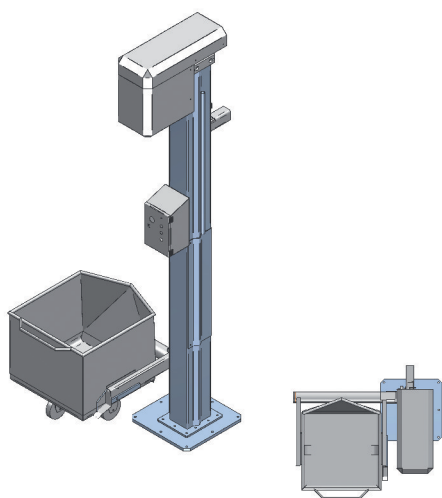

ELEVADOR RBS-500 MODEL B

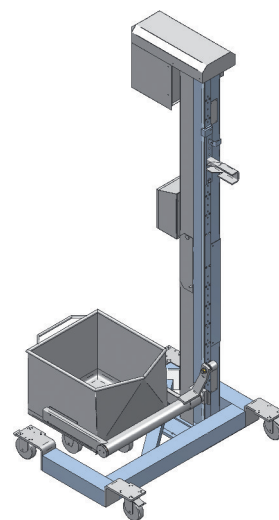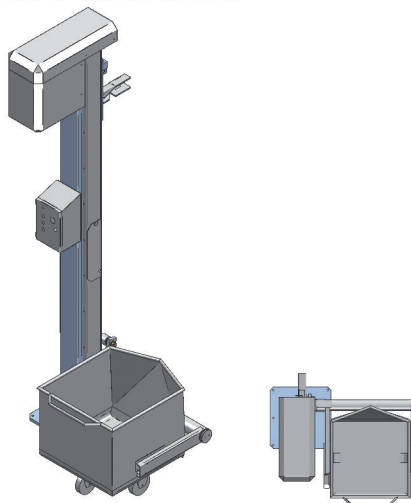

- El elevador, considerado elemento primordial para el logro de mayor rentabilidad en todo tipo de máquina, aporta el ahorro de numerosa mano de obra, gana en productividad y evita la manipulación manual del género.

Los datos precisos para la construcción de cualquier elevador son:

- Posición A o B.
- Altura del suelo a la boca de carga.
- Altura del suelo al techo.

- The lift loader is a very important element to get a higher profitability with all kinds of machines which reduces manual labour, increases productivity and eliminates hand manipulation of goods.

The required data to build any lift loader are:

- Position A or B.
- Height from the floor to the loading gate.
- Height from the floor to ceiling.